LONGi

| Microgrid BESS 250kW/522kWh |

OneNexus M5



POWER CONTINUITY
- 0 ms Seamless On/Off-grid Transfer
- Grid-forming & Black Start Capability
- High IP Grade Inverter and Battery

FLEXIBLE INTEGRATION
- Compatible with Various Generators
- Utility Grid Boost Capability
- Higher PV Penetration

COST OPTIMIZATION
- Up to 40–80% Generator Fuel Saving
- Lower LCOE
- AI-enabled Energy Management

EASY DEPLOYMENT
- All-in-One Design with Built-in EMS
- Plug-and-play Deployment
- Up to 25 Units in Parallel

SYSTEM DIAGRAM

AC Line — DC Line ------ Communication Line

Single Unit

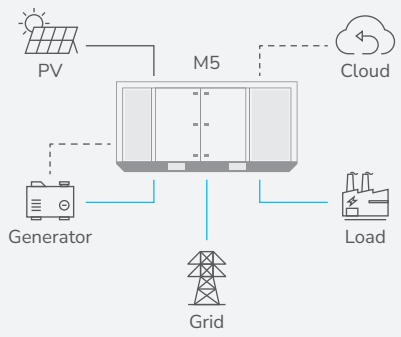

Multi Units

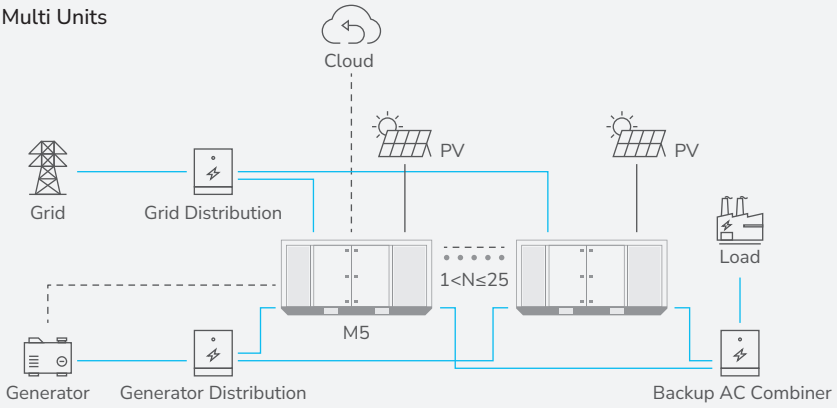

PRODUCT SPECIFICATIONS

Model		M5
DC Input (PV)	Max. PV Array Power (kWp)@STC	250
	Max. DC Voltage (V)	1000
	MPPT Voltage Range (V)	150~950
	Rated DC Voltage (V)	600
	Start Voltage (V)	180
	Max. DC Input Current (A)	10 × 42
	Max. DC Short Circuit Current (A)	10 × 60
	MPPT Number/Max. Input Strings	10/20
Battery Parameters	Battery Type	LiFePO4
	Rated Energy (kWh)	522
	Cell Cycle Life (70% EOL)	>8000
AC	Rated Power (kW/kVA)	250 / 250
	Rated Current (A)	360
	Rated AC Voltage (V)	380 / 400
	Rated Frequency (Hz)	50 / 60
	On-Off-grid Switch Time (ms)	0
	THDv (@ Linear Load)	<3%
	Connection	3+N+PE, Quick-plug Connector
Generator Input	Rated Power (kW)	125
	Rated Current (A)	189.9/180.4
	Rated Voltage (V)	3+N+PE, 380/400
	Rated Frequency (Hz)	50/60
Efficiency	Battery Round-trip Efficiency	≥93.5%
	Battery to AC Efficiency(@Rated Power)	≥98.0%
General Parameters	Communication	Wi-Fi / Ethernet / CAN / RS485
	Operating Temperature Range (°C)	-20 ~ +50
	Operating Ambient Humidity (%)	5–95 (No Condensing)
	Cooling Method	Battery(Liquid Cooling), Inverter(Air Cooling)
	Altitude (m)	≤3000
	Ingress Protection	IP55 (Enclosure), IP66 (Inverter), IP66 (Battery)
	Corrosion Protection	≥C4
	Dimensions (L×W×H) (mm)	3620×1903×1760
	Weight (kg)	6,115
	Certification	CE, UN 38.3

market@longi.com | Copyright © 2026 LONGi Energy Storage. All rights reserved. (20260716 V1.0)

LONGi

| Microgrid BESS 250kW/522kWh |

OneNexus M5S



POWER CONTINUITY
- 0 ms Seamless On/Off-grid Transfer
- Grid-forming & Black Start Capability
- High IP Grade Inverter and Battery

FLEXIBLE INTEGRATION
- Compatible with Various Generators
- Utility Grid Boost Capability
- Higher PV Penetration

COST OPTIMIZATION
- Up to 40–80% Generator Fuel Saving
- Lower LCOE
- AI-enabled Energy Management

EASY DEPLOYMENT
- All-in-One Design with Built-in EMS
- Plug-and-play Deployment
- Up to 25 Units in Parallel

SYSTEM DIAGRAM

AC Line — DC Line ------ Communication Line

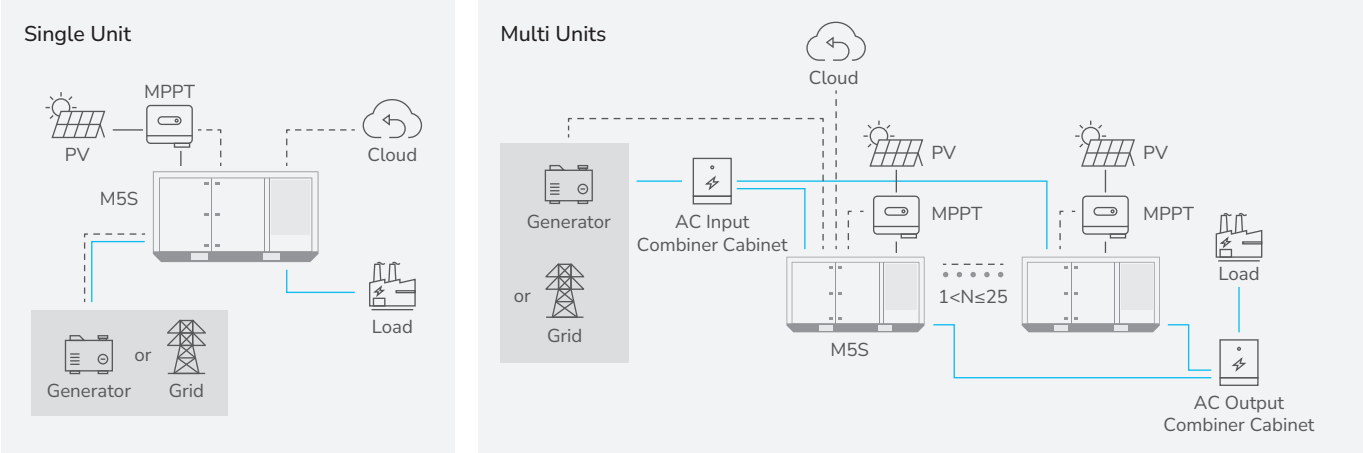

PRODUCT SPECIFICATIONS

Model		M5S
Battery Parameters	Battery Type	LiFePO4
	Rated Energy (kWh)	522
	Cell Cycle Life (70% EOL)	>8000
AC	Rated Power (kW/kVA)	250 / 250
	Rated Current (A)	360
	Rated AC Voltage (V)	380 / 400
	Rated Frequency (Hz)	50 / 60
	On-Off-grid Switch Time (ms)	0
	THDv (@ Linear Load)	<3%
	Connection	3+N+PE, Quick-plug Connector
Generator Input	Rated Power (kW)	250
	Rated Current (A)	360
	Rated Voltage (V)	3+N+PE, 380/400
	Rated Frequency (Hz)	50/60
Efficiency	Battery Round-trip Efficiency	≥93.5%
	Battery to AC Efficiency(@Rated Power)	≥98.0%
General Parameters	Communication	Wi-Fi / Ethernet / CAN / RS485
	Operating Temperature Range (°C)	-20 ~ +50
	Operating Ambient Humidity (%)	5–95 (No Condensing)
	Cooling Method	Battery(Liquid Cooling), Inverter(Air Cooling)
	Altitude (m)	≤3000
	Ingress Protection	IP55 (Enclosure), IP66 (Inverter), IP66 (Battery)
	Corrosion Protection	≥C4
	Dimensions (L×W×H) (mm)	3170×1903×1760
	Weight (kg)	5813
	Certification	CE, UN 38.3

market@longi.com | Copyright © 2026 LONGi Energy Storage. All rights reserved. (20260716 V1.0)

LONGi

| Microgrid BESS 250kW/522kWh |

OneNexus M5C



POWER CONTINUITY

- 20 ms Seamless On/Off-grid Transfer
- Grid-forming & Black Start Capability
- High IP Grade Inverter and Battery

FLEXIBLE INTEGRATION

- Compatible with Various Generators
- Utility Grid Boost Capability
- Higher PV Penetration

COST OPTIMIZATION

- Up to 40–80% Generator Fuel Saving
- Lower LCOE
- AI-enabled Energy Management

EASY DEPLOYMENT

- All-in-One Design with Built-in EMS
- Plug-and-play Deployment
- Up to 25 Units in Parallel

SYSTEM DIAGRAM

AC Line — DC Line ------ Communication Line

Single Unit

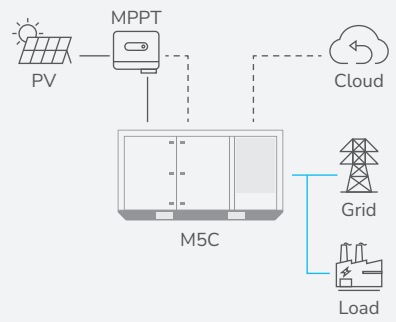

Multi Units

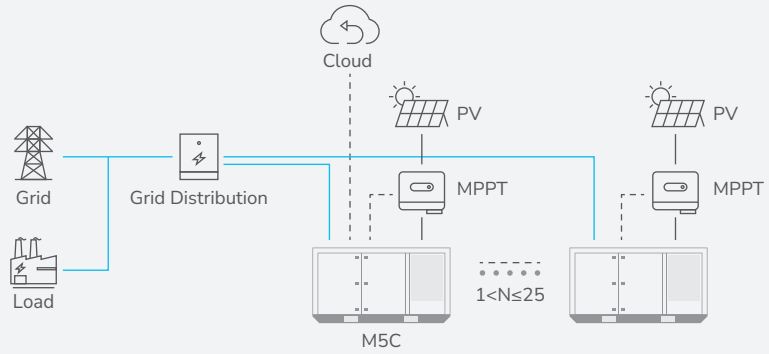

PRODUCT SPECIFICATIONS

Model		M5C
Battery Parameters	Battery Type	LiFePO4
	Rated Energy (kWh)	522
	Cell Cycle Life (70% EOL)	>8000
AC	Rated Power (kW/kVA)	250 / 250
	Rated Current (A)	360
	Rated AC Voltage (V)	380 / 400
	Rated Frequency (Hz)	50 / 60
	On-Off-grid Switch Time (ms)	<20
	THDv (@ Linear Load)	<3%
	Connection	3+N+PE, Quick-plug Connector
Efficiency	Battery Round-trip Efficiency	≥93.5%
	Battery to AC Efficiency(@Rated Power)	≥98.0%
General Parameters	Communication	Wi-Fi / Ethernet / CAN / RS485
	Operating Temperature Range (°C)	-20 ~ +50
	Operating Ambient Humidity (%)	5–95 (No Condensing)
	Cooling Method	Battery(Liquid Cooling), Inverter(Air Cooling)
	Altitude (m)	≤3000
	Ingress Protection	IP55 (Enclosure), IP66 (Inverter), IP66 (Battery)
	Corrosion Protection	≥C4
	Dimensions (L×W×H) (mm)	3170×1903×1760
	Weight (kg)	5500
	Certification	CE, UN 38.3

market@longi.com | Copyright © 2026 LONGi Energy Storage. All rights reserved. (20260716 V1.0)